


LCD Heater Kit

for the EL2000 telephone entry/access control system


Model ELHTRKT

Caution!


A static discharge can
DAMAGE circuit boards.

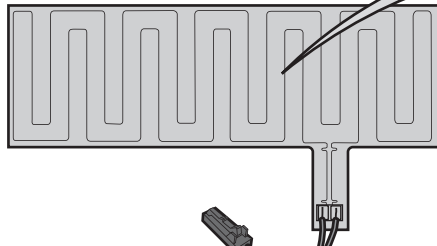


Heater Element
Covers the LCD Screen.

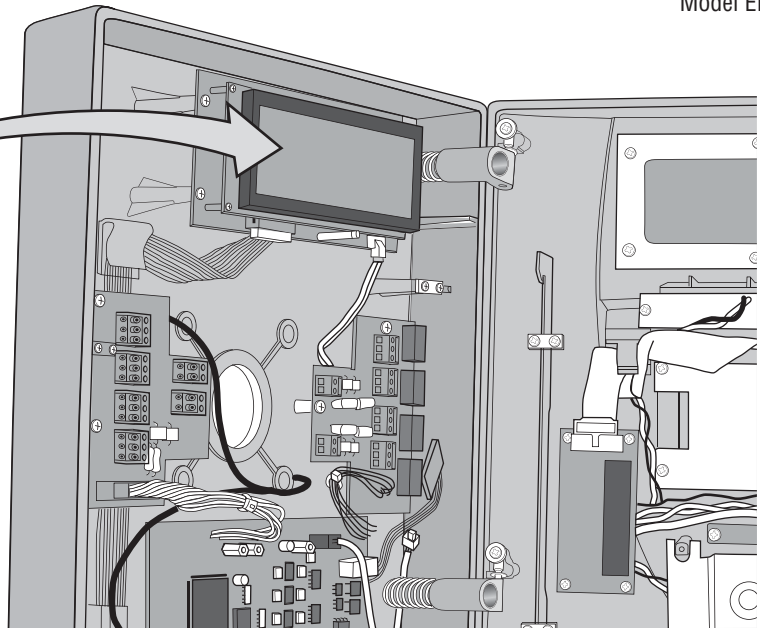


- 1 **Disconnect power to the unit!**
- 2 Unlock and open the unit.
- 3 Clean the LCD with the alcohol wipe provided.

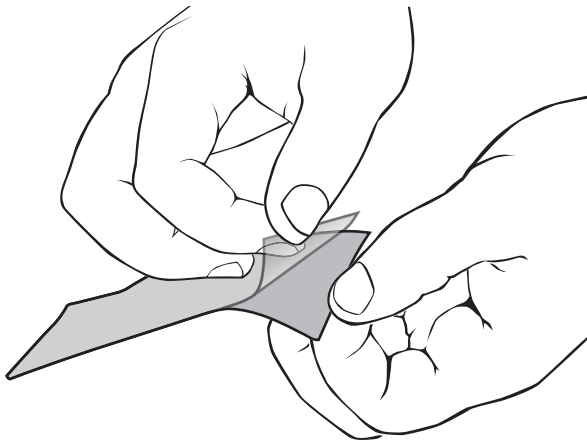

- 4 Peel off adhesive backing and carefully align one end of the heater element on the LCD screen.

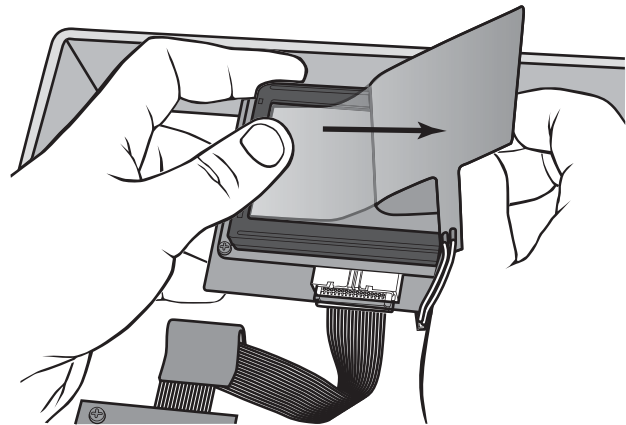

- 5 Press out any air bubbles while pulling back the adhesive backing.

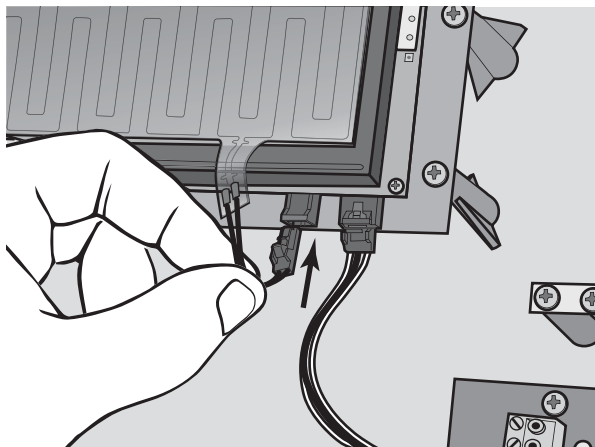

- 6 Plug heater into the LCD board at J4 connector.
- 7 Close unit and connect power.

CHAMBERLAIN®
ELITE™